



SEWAGE SUBMERSIBLE PUMPS



WQ SUBMERSIBLE PUMP SERIES

PUMP INSTALLATION AND APPLICATIONS

Q-Type Sewage/Dirt submersible pump is extensively used in industrial, mining and architectural operations, being made of hard alloy and reliably well-sealed and equipped with overheat/overload protection device, it is also featured by its long durability and safety for use.

MATERIAL AND WORKING LIMITS

- Pump body: Cast iron
- Motor body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Stainless steel
Carbon-ceramic
- Shaft: 45# steel or stainless steel
- Bearing: SKF/NTN/NSK/China
- Insulation class: B/F
- Protection class: IP68

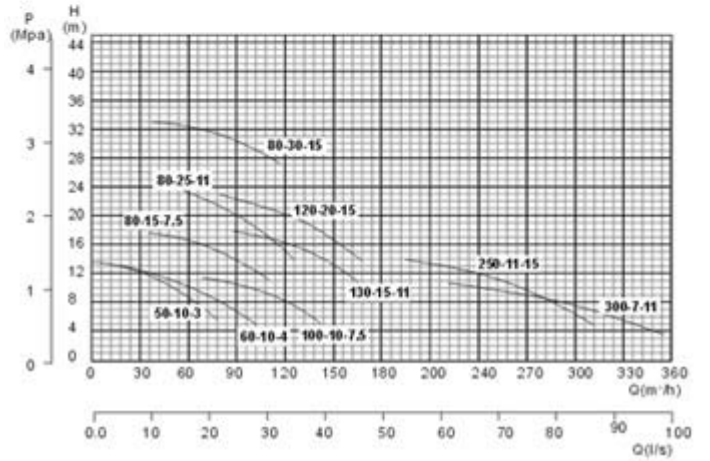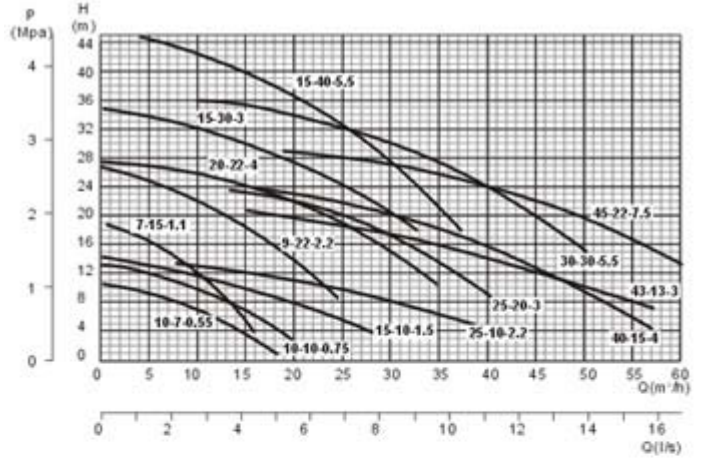

Performance Table

Model	Power		Volt. V	Speed r/min	Flow m ³ /h	Head m	Pipe dia. inch	Package Dimensions & GW				
	HP	kW						L	W	H	Kg	
WQ10-7-0.55	0.75	0.55	380	2900	10	7	1.5"	425	255	220	17	
WQ10-10-0.75	1.0	0.75			10	10	1.5"	460	255	220	22	
WQ7-15-1.1	1.5	1.1			7	15	2"	540	270	200	32	
WQ15-10-1.5	2.0	1.5			15	10	2.5"	540	245	265	35	
WQ9-22-2.2	3.0	2.2			9	22	2"	580	275	305	37	
WQ15-20-2.2	3.0	2.2			15	20	2.5"	550	300	260	38	
WQ25-10-2.2	3.0	2.2			25	10	3"	580	275	305	37	
WQ15-30-3	4	3			15	30	2"	640	295	310	48	
WQ25-20-3	4	3			25	20	2.5"	640	295	310	51	
WQ43-13-3	4	3			43	13	3"	640	295	310	52	
WQ50-10-3	4	3			50	10	4"	680	320	340	54	
WQ20-22-4	5	4			20	22	2.5"	700	380	310	65	
WQ40-15-4	5	4			40	15	3"	720	320	340	79	
WQ60-10-4	5	4			60	10	4"	720	380	340	79	
WQ15-40-5.5	7.5	5.5			15	40	2.5"	720	380	310	78	
WQ30-30-5.5	7.5	5.5			30	30	3"	720	380	310	88	
WQ45-22-7.5	10	7.5			45	22	3"	745	410	410	134	
WQ80-15-7.5	10	7.5			80	15	5"	1020	410	410	135	
WQ100-10-7.5	10	7.5		100	10	6"	1100	410	410	150		
WQ80-25-11	15	11		80	25	4"	1100	425	660	270		
WQ130-15-11	15	11		130	15	6"	1130	425	710	275		
WQ300-7-11	15	11		300	7	8"	1130	425	660	275		
WQ80-50-15	20	15		80	50	4"	1130	450	755	280		
WQ130-20-15	20	15		130	20	6"	1180	450	755	285		
WQ250-11-15	20	15		250	11	8"	1180	450	820	290		
					1450							